
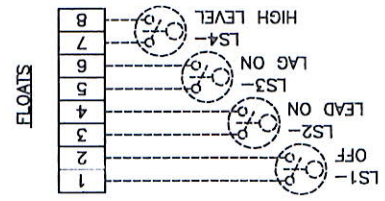



INCOMING POWER



- NOTES:**
- 1) FLOAT SWITCHES MUST BE RATED A MINIMUM OF 2 AMPS AT 115 VOLTS.
 - 2) TORQUE ALL WHITE 1/2" WIRING TERMINALS TO THE PROPER TORQUE AS FOLLOWS:
 - FOR: #4-#18 AWG WIRE, TORQUE TO 20 IN.LBS.
 - 3) TORQUE ALL BLACK DEAD FRONT TERMINAL BLOCKS TO 16 IN.LBS.
 - 4) TORQUE ALL GREY 3/8" WIRING TERMINALS TO 16 IN.LBS.
 - 5) USE 60°C COPPER WIRE ONLY MINIMUM FOR LESS THAN 100 AMPS.
 - 6) USE 75°C COPPER WIRE ONLY MINIMUM FOR 100 AMPS OR GREATER.
 - 7) ALL PENETRATIONS MUST MEET THE ENCLOSURE TYPE RATING INDICATED ON THE "UL" INFORMATION LABEL.

VOLTAGE: 115/230	PHASE: 1	HERTZ: 60	HP/FLA: 2/20 MAX	<p>OECO OHIO ELECTRIC CONTROL, INC. 2395 Rock Road Ashland, Ohio 44805</p>	TITLE: CFDUP
ENCLOSURE TYPE: 4X	SHORT CIRCUIT CURRENT: 5: A	RMS SYMMETRIC L: 240V MINIMUM	JDP		SHEET OF
DATE: 2-22	REV DATE:				REV DATE:
					DWG. NO.: 220210UT06